STAINLESS STRUCTURALS
SPECIAL PROFILES IN STEEL

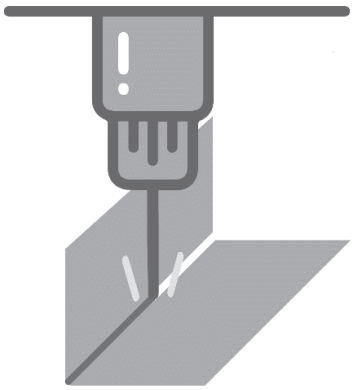

TECHNICAL CAPABILITIES

STANDARD SECTIONS

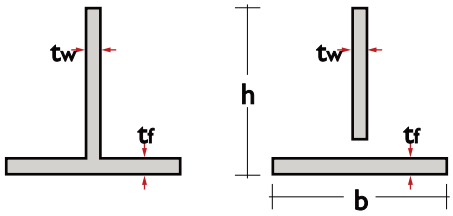

SHAPE		h	b	tw	tf	Tapering	Full Pen
	Min	n/a	0.5“	n/a	0.125“	N/A	N/A
	Max	n/a	30“	n/a	1.5“	N/A	N/A
	Min	0.75“	0.75“	0.125“	0.125“	YES	Up to 1.5”
	Max	36“	20“	1.5“	1.5“	B up to 20“ H up to 36“	
	Min	1“	0.75“	0.125“	0.125“	YES	Up to 1.5”
	Max	36“	20“	1.5“	1.5“	B up to 20“ H up to 36“	
	Min	0.75“	0.75“	0.125“	0.125“	YES	Up to 1.5”
	Max	36“	20“	1.5“	1.5“	B up to 20“ H up to 36“	
	Min	0.75“	0.75“	0.125“	0.125“	YES	Up to 1.5”
	Max	36“	20“	1.5“	1.5“	B up to 20“ H up to 36“	
	Min	0.75“	0.75“	0.125“	0.125“	YES	Up to 0.625”
	Max	20“	20“	1.5“	1.5“	B up to 20“ H up to 36“	
	Min	0.75“	0.75“	0.125“	0.125“	YES	Up to 0.625”
	Max	36“	20“	1.5“	1.5“	B up to 20“ H up to 36“	

STAINLESS STRUCTURALS
SPECIAL PROFILES IN STEEL

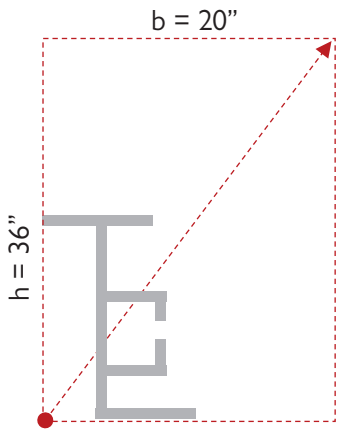

TECHNICAL CAPABILITIES

CUSTOM SECTIONS

(anything that fits in a 20” x 36” rectangular shape)

EXAMPLES OF PRODUCED SECTIONS

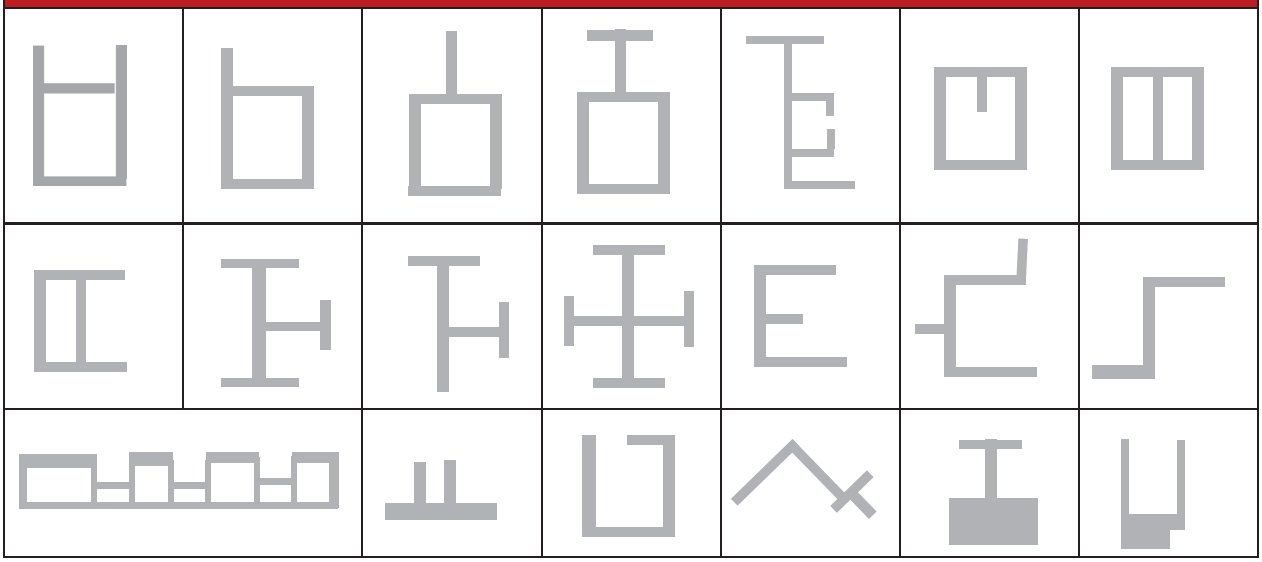

FURTHER INFORMATION

Commonly manufactured grades	Stainless Steel: 304/304L; 316/316L; 317L; 310S; 309; 321; 410; 2205; 2507; 904L Carbon Steel: A36; Gr.50; Gr. 65
Lengths	5“ – 600“
Cut-to-length	Level I: -0/+4“; Level II: -0/+1“; level III: -0/+0.25”
Holes / Slots	Any size, as small as material thickness
Coping / cut outs	Drawing assessment needed before confirmation
Additional Services	Fabrication, Milling, Polishing